


Metric Power-Wedge® Cog-Belt® – Narrow Section Wedge Belt

- **EXACT REPLACEMENT FOR DRIVES ON IMPORTED EUROPEAN MACHINERY**
- **COMPACT DRIVES**
- **HIGHER (lower cost) RPM MOTORS**
- **HIGHER REDUCTION RATIO**
- **SHORTENED CENTERS**
- **chekmate™ MATCHING**

Metric Power-Wedge V-belts are manufactured for high performance. They are highly flexible, resist stretch, heat, oils, chemicals and ozone, and dissipate electrostatic charges.

Metric Power-Wedge® V-belts are marked with the letters (SPZX, SPAX, SPBX, SPCX) which identify the section and a series of numbers which represents the pitch length in mm. The metric wedge belt is the standard in the metric system.

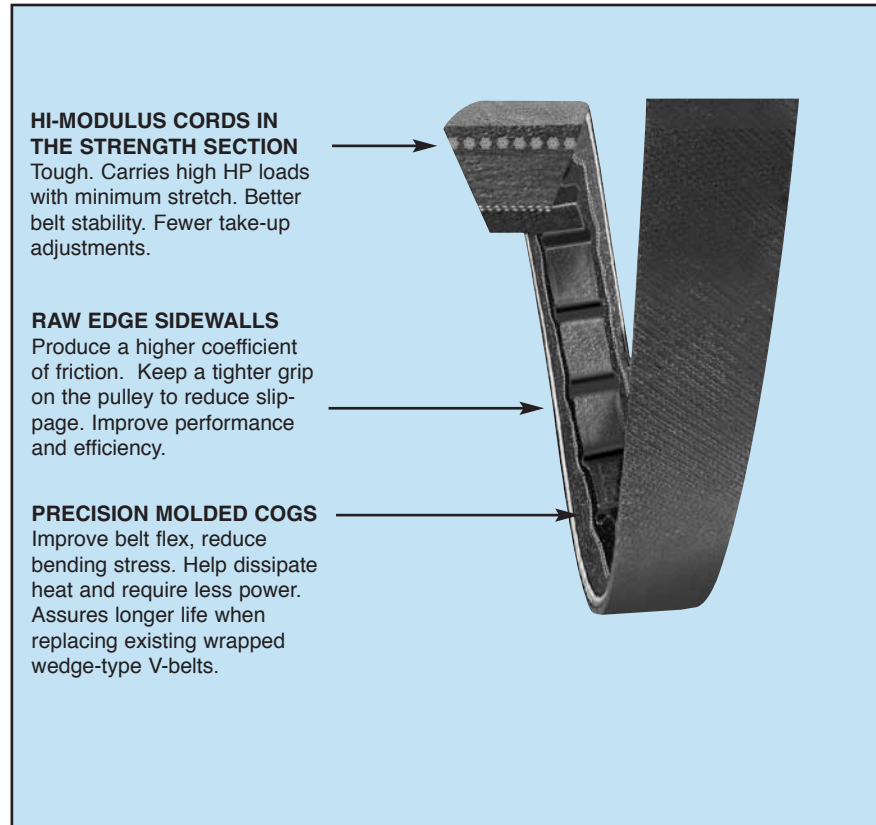

METRIC WEDGE DIMENSIONS

section	top width (mm)	thickness (mm)
SPZX	9.7	8.0
SPAX	12.7	10.0
SPBX	16.3	13.0
SPCX	22.0	18.0



Metric Power-Wedge® Cog-Belt® (continued)

Part No.	Outside Length (mm)	Outside Length (inches)	Wt. (lbs.)
----------	---------------------	-------------------------	------------

SPZX Section

SPZX630	643	24.8	0.1
SPZX670	683	26.4	0.1
SPZX710	723	28.0	0.1
SPZX750	763	29.5	0.1
SPZX760	773	29.9	0.1
SPZX800	813	31.5	0.1
SPZX850	863	33.5	0.2
SPZX875	888	34.4	0.2
SPZX900	913	35.4	0.2
SPZX925	938	36.4	0.2
SPZX940	953	37.0	0.2
SPZX950	963	37.4	0.2
SPZX1000	1013	39.4	0.2
SPZX1010	1023	39.8	0.2
SPZX1030	1043	40.6	0.2
SPZX1060	1073	41.7	0.2
SPZX1080	1093	42.5	0.2
SPZX1090	1103	42.9	0.2
SPZX1120	1133	44.1	0.2
SPZX1140	1153	44.9	0.2
SPZX1150	1163	45.3	0.2
SPZX1180	1193	46.5	0.2
SPZX1200	1213	47.2	0.2
SPZX1220	1233	48.0	0.2
SPZX1250	1263	49.2	0.2
SPZX1270	1283	50.0	0.2
SPZX1280	1293	50.4	0.2
SPZX1320	1333	52.0	0.2
SPZX1340	1353	52.8	0.2
SPZX1360	1373	53.5	0.2
SPZX1400	1413	55.1	0.2
SPZX1420	1433	55.9	0.2
SPZX1450	1463	57.1	0.3
SPZX1470	1483	57.9	0.3
SPZX1500	1513	59.1	0.3
SPZX1520	1533	59.8	0.3
SPZX1560	1573	61.4	0.3
SPZX1600	1613	63.0	0.3
SPZX1650	1663	65.0	0.3
SPZX1700	1713	66.9	0.3
SPZX1800	1813	70.9	0.3
SPZX1850	1863	72.8	0.3
SPZX1900	1913	74.8	0.3
SPZX2000	2013	78.7	0.4
SPZX2030	2043	79.9	0.4
SPZX2120	2133	83.5	0.4
SPZX2160	2173	85.0	0.4
SPZX2240	2253	88.2	0.4
SPZX2280	2293	89.8	0.4
SPZX2360	2373	92.9	0.4
SPZX2410	2423	94.9	0.4
SPZX2500	2513	98.4	0.4
SPZX2540	2553	100.0	0.4
SPZX2650	2663	104.3	0.5
SPZX2670	2683	105.1	0.5
SPZX2690	2703	105.9	0.5
SPZX2800	2813	110.2	0.5
SPZX2840	2853	111.8	0.5

Part No.	Outside Length (mm)	Outside Length (inches)	Wt. (lbs.)
----------	---------------------	-------------------------	------------

SPZX Section

SPZX3000	3013	118.1	0.6
SPZX3150	3163	124.0	0.6
SPZX3170	3183	124.8	0.6
SPZX3350	3363	131.9	0.7
SPZX3450	3463	135.8	0.7
SPZX3550	3563	139.8	0.7
SPZX3810	3823	150.0	0.7

SPAX Section

SPAX800	818	31.5	0.2
SPAX850	868	33.5	0.2
SPAX900	918	35.4	0.3
SPAX925	943	36.4	0.3
SPAX950	968	37.4	0.3
SPAX1000	1018	39.4	0.3
SPAX1060	1078	41.7	0.3
SPAX1090	1108	42.9	0.4
SPAX1120	1138	44.1	0.4
SPAX1150	1168	45.3	0.4
SPAX1180	1198	46.5	0.4
SPAX1220	1238	48.0	0.4
SPAX1250	1268	49.2	0.4
SPAX1280	1298	50.4	0.4
SPAX1320	1338	52.0	0.4
SPAX1360	1378	53.5	0.4
SPAX1400	1418	55.1	0.5
SPAX1450	1468	57.1	0.5
SPAX1500	1518	59.1	0.5
SPAX1532	1550	60.3	5.0
SPAX1550	1568	61.0	0.5
SPAX1600	1618	63.0	0.5
SPAX1650	1668	65.0	0.5
SPAX1700	1718	66.9	0.5
SPAX1750	1768	68.9	0.6
SPAX1800	1818	70.9	0.6
SPAX1832	1850	72.1	0.6
SPAX1850	1868	72.8	0.6
SPAX1900	1918	74.8	0.6
SPAX1950	1968	76.8	0.6
SPAX1957	1975	77.0	0.6
SPAX1982	2000	78.0	0.6
SPAX2000	2018	78.7	0.6
SPAX2032	2050	80.0	0.7
SPAX2057	2075	81.0	0.7
SPAX2060	2078	81.1	0.7
SPAX2120	2138	83.5	0.7
SPAX2160	2178	85.0	0.7
SPAX2180	2198	85.8	0.7
SPAX2182	2200	85.9	0.7
SPAX2240	2258	88.2	0.7
SPAX2282	2300	89.8	0.7
SPAX2300	2318	90.6	0.7
SPAX2360	2378	92.9	0.8
SPAX2432	2450	95.7	0.8
SPAX2482	2500	98.4	0.8
SPAX2500	2518	98.4	0.8
SPAX2532	2550	99.7	0.8

Metric Power-Wedge® Cog-Belt® (continued)

Part No.	Outside Length (mm)	Outside Length (inches)	Wt. (lbs.)
----------	---------------------	-------------------------	------------

SPAX Section

SPAX2582	2600	101.7	0.8
SPAX2607	2625	102.6	0.8
SPAX2632	2650	103.6	0.8
SPAX2650	2668	104.3	0.9
SPAX2682	2700	105.6	0.9
SPAX2732	2750	107.6	0.9
SPAX2782	2800	109.5	0.9
SPAX2800	2818	110.2	0.9
SPAX3000	3018	118.1	1.0
SPAX3150	3168	124.0	1.0
SPAX3350	3368	131.9	1.1
SPAX3550	3568	139.8	1.1
SPAX3750	3768	147.6	1.2
SPAX4000	4018	157.5	1.3
SPAX4250	4268	167.3	1.4
SPAX4500	4518	177.2	1.4

SPBX Section

SPBX1150	1172	45.3	0.6
SPBX1200	1222	47.2	0.6
SPBX1250	1272	49.2	0.6
SPBX1260	1282	49.6	0.6
SPBX1320	1342	52.0	0.7
SPBX1340	1362	52.8	0.7
SPBX1370	1392	53.9	0.7
SPBX1400	1422	55.1	0.7
SPBX1410	1432	55.5	0.7
SPBX1450	1472	57.1	0.7
SPBX1500	1522	59.1	0.7
SPBX1525	1547	60.0	0.7
SPBX1550	1572	61.0	0.7
SPBX1600	1622	63.0	0.7
SPBX1650	1672	65.0	0.8
SPBX1700	1722	66.9	0.8
SPBX1750	1772	68.9	0.8
SPBX1800	1822	70.9	0.8
SPBX1850	1872	72.8	0.8
SPBX1900	1922	74.8	0.8
SPBX2000	2022	78.7	0.9
SPBX2020	2042	79.5	0.9
SPBX2060	2082	81.1	0.9
SPBX2120	2142	83.5	0.9
SPBX2150	2172	84.6	0.9
SPBX2180	2202	85.8	0.9
SPBX2240	2262	88.2	0.9
SPBX2280	2302	89.8	1.1
SPBX2360	2382	92.9	1.1
SPBX2410	2432	94.9	1.1
SPBX2440	2462	96.1	1.1
SPBX2500	2522	98.4	1.2
SPBX2530	2552	99.6	1.2
SPBX2610	2632	102.8	1.2
SPBX2650	2672	104.3	1.2
SPBX2680	2702	105.5	1.2
SPBX2740	2762	107.9	1.3
SPBX2800	2822	110.2	1.3
SPBX2840	2862	111.8	1.3

Part No.	Outside Length (mm)	Outside Length (inches)	Wt. (lbs.)
----------	---------------------	-------------------------	------------

SPBX Section

SPBX2900	2922	114.2	1.4
SPBX2920	2942	115.0	1.4
SPBX3000	3022	118.1	1.4
SPBX3150	3172	124.0	1.5
SPBX3170	3192	124.8	1.5
SPBX3250	3272	128.0	1.6
SPBX3350	3372	131.9	1.6
SPBX3550	3572	139.8	1.7
SPBX3750	3772	147.6	1.7
SPBX3800	3822	149.6	1.7
SPBX3870	3892	152.4	1.8
SPBX4000	4022	157.5	1.8
SPBX4060	4082	159.8	1.9
SPBX4250	4272	167.3	1.9
SPBX4310	4332	169.7	2.0
SPBX4500	4522	177.2	2.1
SPBX4560	4582	179.5	2.2
SPBX4750	4772	187.0	2.3
SPBX4820	4842	189.8	2.3
SPBX5000	5022	196.9	2.4
SPBX5070	5092	199.6	2.5

SPCX Section

SPCX2000	2030	78.7	1.2
SPCX2120	2150	83.5	1.2
SPCX2240	2270	88.2	1.3
SPCX2360	2390	92.9	1.4
SPCX2500	2530	98.4	1.5
SPCX2650	2680	104.3	1.6
SPCX2800	2830	110.2	1.6
SPCX3000	3030	118.1	1.8
SPCX3150	3180	124.0	1.8
SPCX3350	3380	131.9	2.0
SPCX3550	3580	139.8	2.1
SPCX3750	3780	147.6	2.2
SPCX4000	4030	157.5	2.3
SPCX4250	4280	167.3	2.5
SPCX4500	4530	177.2	2.6
SPCX4750	4780	187.0	2.8
SPCX5000	5030	196.9	2.9



**Call or Email
Maumee Hose & Belting
for Pricing**

Ph. 419-893-7272 • Fax 419-893-4744
720 Illinois Avenue • Maumee, Ohio 43537 USA
Email: info@maumeehose.com
Web: www.maumeehose.com