


## Wedge-Band® V-Belts (Wrapped Molded Construction)

- **ELIMINATES WHIP AND TURNOVER ON NARROW DRIVES**
- **SMOOTHER CLUTCHING**
- **SPACE & WEIGHT SAVER**

**Recommended Pulleys**  
 Carlisle QD Power-Wedge Pulleys (3V, 5V, 8V)

The Carlisle Wedge-Band is an excellent choice for virtually any application where increased horsepower capacity/output is needed. Or where conventional single or multiple-belt drives are impractical because of space or weight limitations.

It's Carlisle's banded version of its hard-working Super Power-Wedge Belt. The patented banding process assures smoother, quieter operation. The specially compounded wrap construction is ideal for clutching operations. And it won't turn over or jump off the drive. It's oil and heat resistant; static dissipating, too.

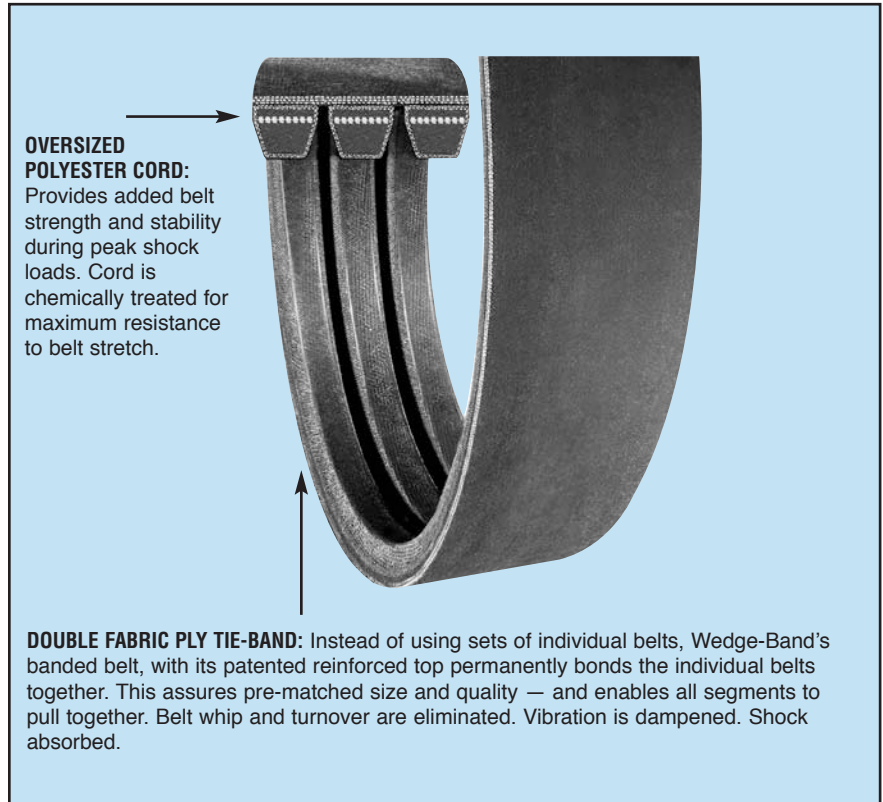

### ORDERING INFORMATION


For complete number, add number of ribs required .

R5V710

3

Part  
Number

Number  
of Ribs

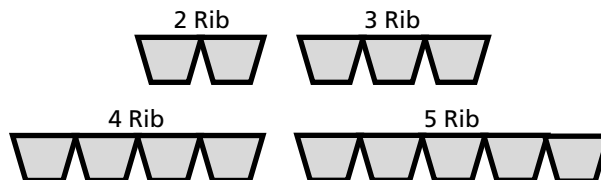

## Wedge-Band® V-Belts (Wrapped Molded Construction continued)

Length Code	Outside Length (inches)	Metric Length Code	Weight per rib (lbs.)
-------------	-------------------------	--------------------	-----------------------

### R3V — Banded 3V Section

For complete number, add number of ribs required: EXAMPLE: R3V250-5

R3V250	26.1	—	0.10
R3V265	27.6	—	0.10
R3V280	29.1	—	0.10
R3V300	31.1	—	0.15
R3V315	32.6	—	0.15
R3V335	34.6	9N850J	0.15
R3V355	36.6	9N900J	0.15
R3V375	38.6	9N950J	0.15
R3V400	41.1	9N1015J	0.20
R3V425	43.6	9N1080J	0.20
R3V450	46.1	9N1145J	0.20
R3V475	48.6	9N1205J	0.20
R3V500	51.1	9N1270J	0.20
R3V530	54.1	9N1345J	0.25
R3V560	57.1	9N1420J	0.25
R3V600	61.1	9N1525J	0.25
R3V630	64.1	9N1600J	0.30
R3V670	68.1	9N1700J	0.30
R3V710	72.1	9N1800J	0.30
R3V750	76.1	9N1900J	0.35
R3V800	81.1	9N2030J	0.35
R3V850	86.1	9N2160J	0.40
R3V900	91.1	9N2290J	0.40
R3V950	96.1	9N2410J	0.45
R3V1000	101.1	9N2540J	0.45
R3V1060	107.1	9N2690J	0.50
R3V1120	113.1	9N2840J	0.50
R3V1180	119.1	9N3000J	0.55
R3V1250	126.1	9N3180J	0.55
R3V1320	133.1	9N3350J	0.60
R3V1400	141.1	9N3550J	0.65

### R5V — Banded 5V Section

For complete number, add number of ribs required: EXAMPLE: R5V500-5

R5V500	51.1	15N1270J	0.65
R5V530	54.1	15N1345J	0.65
R5V560	57.1	15N1420J	0.70
R5V600	61.1	15N1525J	0.75
R5V630	64.1	15N1600J	0.80
R5V670	68.1	15N1700J	0.85
R5V710	72.1	15N1800J	0.90
R5V750	76.1	15N1900J	0.95
R5V800	81.1	15N2030J	1.00
R5V850	86.1	15N2160J	1.10
R5V900	91.1	15N2290J	1.15
R5V950	96.1	15N2410J	1.20
R5V1000	101.1	15N2540J	1.30
R5V1060	107.1	—	1.40
R5V1120	113.1	15N2840J	1.45
R5V1180	119.1	15N3000J	1.50
R5V1250	126.1	15N3180J	1.60
R5V1320	133.1	15N3350J	1.70
R5V1400	141.1	15N3550J	1.80
R5V1500	151.1	15N3810J	1.90
R5V1600	161.1	15N4060J	2.05

Length Code	Outside Length (inches)	Metric Length Code	Weight per rib (lbs.)
-------------	-------------------------	--------------------	-----------------------

### R5V — Banded 5V Section

For complete number, add number of ribs required: EXAMPLE: R5V500-5

R5V1700	171.1	15N4320J	2.20
R5V1800	181.1	15N4570J	2.30
R5V1900	191.1	15N4830J	2.45
R5V2000	201.1	15N5080J	2.55
R5V2120	213.1	15N5380J	2.75
R5V2240	225.1	15N5690J	2.90
R5V2360	237.1	15N6000J	3.00
R5V2500	251.1	15N6350J	3.20
R5V2650	266.1	15N6730J	3.40
R5V2800	281.1	15N7100J	3.60
R5V3000	301.1	15N7620J	3.85
R5V3150	316.1	15N8000J	4.05
R5V3350	336.1	15N8500J	4.35
R5V3550	356.1	15N9000J	4.70

### R8V — Banded 8V Section

For complete number, add number of ribs required: EXAMPLE: R8V1000-5

R8V1000	101.5	25N2540J	3.30
R8V1060	107.5	25N2690J	3.50
R8V1120	113.5	25N2840J	3.70
R8V1180	119.5	25N3000J	3.80
R8V1250	126.5	25N3180J	4.15
R8V1320	133.5	25N3350J	4.35
R8V1400	141.5	25N3550J	4.65
R8V1500	151.5	25N3810J	5.00
R8V1600	161.5	25N4060J	5.35
R8V1700	171.5	25N4320J	5.70
R8V1800	181.5	25N4570J	6.00
R8V1900	191.5	25N4830J	6.35
R8V2000	201.5	25N5080J	6.70
R8V2120	213.1	25N5380J	7.10
R8V2240	225.5	25N5690J	7.50
R8V2360	237.5	25N6000J	7.90
R8V2500	251.5	25N6350J	8.40
R8V2650	266.5	25N6730J	8.90
R8V2800	281.5	25N7100J	9.14
R8V3000	301.5	25N7620J	10.10
R8V3150	316.1	25N8000J	10.60
R8V3350	336.1	25N8500J	11.30
R8V3550	356.5	25N9000J	12.00
R8V3750	376.5	25N9500J	12.65
R8V4000	401.5	25N10160J	13.50
R8V4250	426.5	25N10800J	14.35
R8V4500	451.5	25N11430J	15.20
R8V4750	476.1	25N12060J	16.05
R8V5000	501.5	25N12700J	16.90
R8V5600	561.5	25N14200J	18.90
R8V6000	601.5	25N15250J	20.25

\*Contact Carlisle for availability. Additional ribs available on a MTO basis.



**Call or Email Maumee Hose & Belting for Pricing**

Ph. 419-893-7272 • Fax 419-893-4744 • Email: info@maumeehose.com • Web: www.maumeehose.com

720 Illinois Avenue • Maumee, Ohio 43537 USA